

MySQL and Mac OS X

MySQL and Mac OS X

Abstract

This is the MySQL Mac OS X extract from the MySQL [MySQL Reference Manual](#).

Document generated on: 2011-02-24 (revision: 25144)

Copyright © 1997, 2011, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. MySQL is a trademark of Oracle Corporation and/or its affiliates, and shall not be used without Oracle's express written authorization. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this material is subject to the terms and conditions of your Oracle Software License and Service Agreement, which has been executed and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle or as specifically provided below. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

This documentation is NOT distributed under a GPL license. Use of this documentation is subject to the following terms:

You may create a printed copy of this documentation solely for your own personal use. Conversion to other formats is allowed as long as the actual content is not altered or edited in any way. You shall not publish or distribute this documentation in any form or on any media, except if you distribute the documentation in a manner similar to how Oracle disseminates it (that is, electronically for download on a Web site with the software) or on a CD-ROM or similar medium, provided however that the documentation is disseminated together with the software on the same medium. Any other use, such as any dissemination of printed copies or use of this documentation, in whole or in part, in another publication, requires the prior written consent from an authorized representative of Oracle. Oracle and/or its affiliates reserve any and all rights to this documentation not expressly granted above.

For more information on the terms of this license, for details on how the MySQL documentation is built and produced, or if you are interested in doing a translation, please visit [MySQL Contact & Questions](#).

For additional licensing information, including licenses for third-party libraries used by MySQL products, see [Preface and Notes](#).

If you want help with using MySQL, please visit either the [MySQL Forums](#) or [MySQL Mailing Lists](#) where you can discuss your issues with other MySQL users.

For additional documentation on MySQL products, including translations of the documentation into other languages, and downloadable versions in variety of formats, including HTML and PDF formats, see the [MySQL Documentation Library](#).

Installing MySQL on Mac OS X

MySQL for Mac OS X is available in a number of different forms:

- Native Package Installer format, which uses the native Mac OS X installer to walk you through the installation of MySQL. For more information, see [Chapter 1, *Installing MySQL on Mac OS X Using Native Packages*](#). You can use the package installer with Mac OS X 10.3 and later, and the package is available for both PowerPC and Intel architectures, and 32-bit and 64-bit architectures. There is no Universal Binary available using the package installation method. The user you use to perform the installation must have administrator privileges.
- Tar package format, which uses a file packaged using the Unix `tar` and `gzip` commands. To use this method, you will need to open a `Terminal` window. You do not need administrator privileges using this method, as you can install the MySQL server anywhere using this method. For more information on using this method, you can use the generic instructions for using a tarball, [Installing MySQL from Generic Binaries on Unix/Linux](#). You can use the package installer with Mac OS X 10.3 and later, and available for both PowerPC and Intel architectures, and both 32-bit and 64-bit architectures. A Universal Binary, incorporating both Power PC and Intel architectures and 32-bit and 64-bit binaries is available.

In addition to the core installation, the Package Installer also includes [Chapter 2, *Installing the MySQL Startup Item*](#) and [Chapter 3, *Installing and Using the MySQL Preference Pane*](#), both of which simplify the management of your installation.

- Mac OS X server includes a version of MySQL as standard. If you want to use a more recent version than that supplied with the Mac OS X server release, you can make use of the package or tar formats. For more information on using the MySQL bundled with Mac OS X, see [Chapter 4, *Using the Bundled MySQL on Mac OS X Server*](#).

For additional information on using MySQL on Mac OS X, see [Chapter 5, *General Notes on Installing MySQL on Mac OS X*](#).

Chapter 1. Installing MySQL on Mac OS X Using Native Packages

You can install MySQL on Mac OS X 10.3.x (“Panther”) or newer using a Mac OS X binary package in PKG format instead of the binary tarball distribution. Please note that older versions of Mac OS X (for example, 10.1.x or 10.2.x) are *not* supported by this package.

The package is located inside a disk image ([.dmg](#)) file that you first need to mount by double-clicking its icon in the Finder. It should then mount the image and display its contents.

Note

Before proceeding with the installation, be sure to stop all running MySQL server instances by using either the MySQL Manager Application (on Mac OS X Server) or `mysqladmin shutdown` on the command line.

When installing from the package version, you should also install the MySQL Preference Pane, which will enable you to control the startup and execution of your MySQL server from System Preferences. For more information, see [Chapter 3, Installing and Using the MySQL Preference Pane](#).


When installing using the package installer, the files are installed into a directory within `/usr/local` matching the name of the installation version and platform. For example, the installer file `mysql-5.1.39-osx10.5-x86_64.pkg` installs MySQL into `/usr/local/mysql-5.1.39-osx10.5-x86_64`. The following table shows the layout of the installation directory.

Table 1.1. MySQL Installation Layout on Mac OS X


Directory	Contents of Directory
<code>bin</code>	Client programs and the <code>mysqld</code> server
<code>data</code>	Log files, databases
<code>docs</code>	Manual in Info format
<code>include</code>	Include (header) files
<code>lib</code>	Libraries
<code>man</code>	Unix manual pages
<code>mysql-test</code>	MySQL test suite
<code>scripts</code>	<code>mysql_install_db</code>
<code>share</code>	Miscellaneous support files, including error messages, sample configuration files, SQL for database installation
<code>sql-bench</code>	Benchmarks
<code>support-files</code>	Scripts and sample configuration files
<code>/tmp/mysql.sock</code>	Location of the MySQL Unix socket

During the package installer process, a symbolic link from `/usr/local/mysql` to the version/platform specific directory created during installation will be created automatically.

1. Download and open the MySQL package installer, which is provided on a disk image ([.dmg](#)) that includes the main MySQL installation package, the `MySQLStartupItem.pkg` installation package, and the `MySQL.prefPane`. Double-click the disk image to open it.
2. Double-click the MySQL installer package. It will be named according to the version of MySQL you have downloaded. For example, if you have downloaded MySQL 5.1.39, double-click `mysql-5.1.39-osx10.5-x86.pkg`.
3. You will be presented with the opening installer dialog. Click CONTINUE to begin installation.

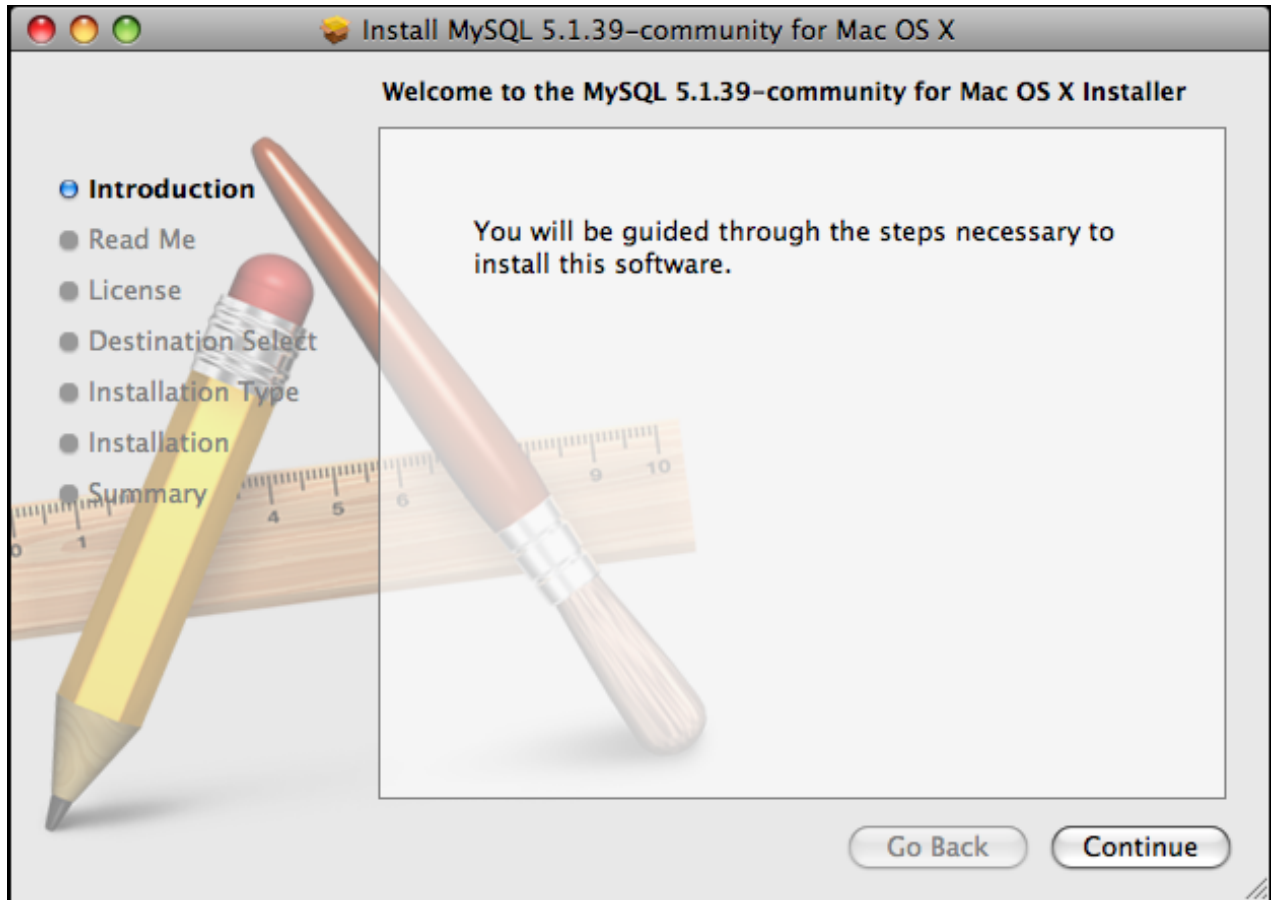

4. A copy of the installation instructions and other important information relevant to this installation are displayed. Click CONTINUE .
5. If you have downloaded the community version of MySQL, you will be shown a copy of the relevant GNU General Public License. Click CONTINUE .
6. Select the drive you want to use to install the MySQL Startup Item. The drive must have a valid, bootable, Mac OS X operating system installed. Click CONTINUE.

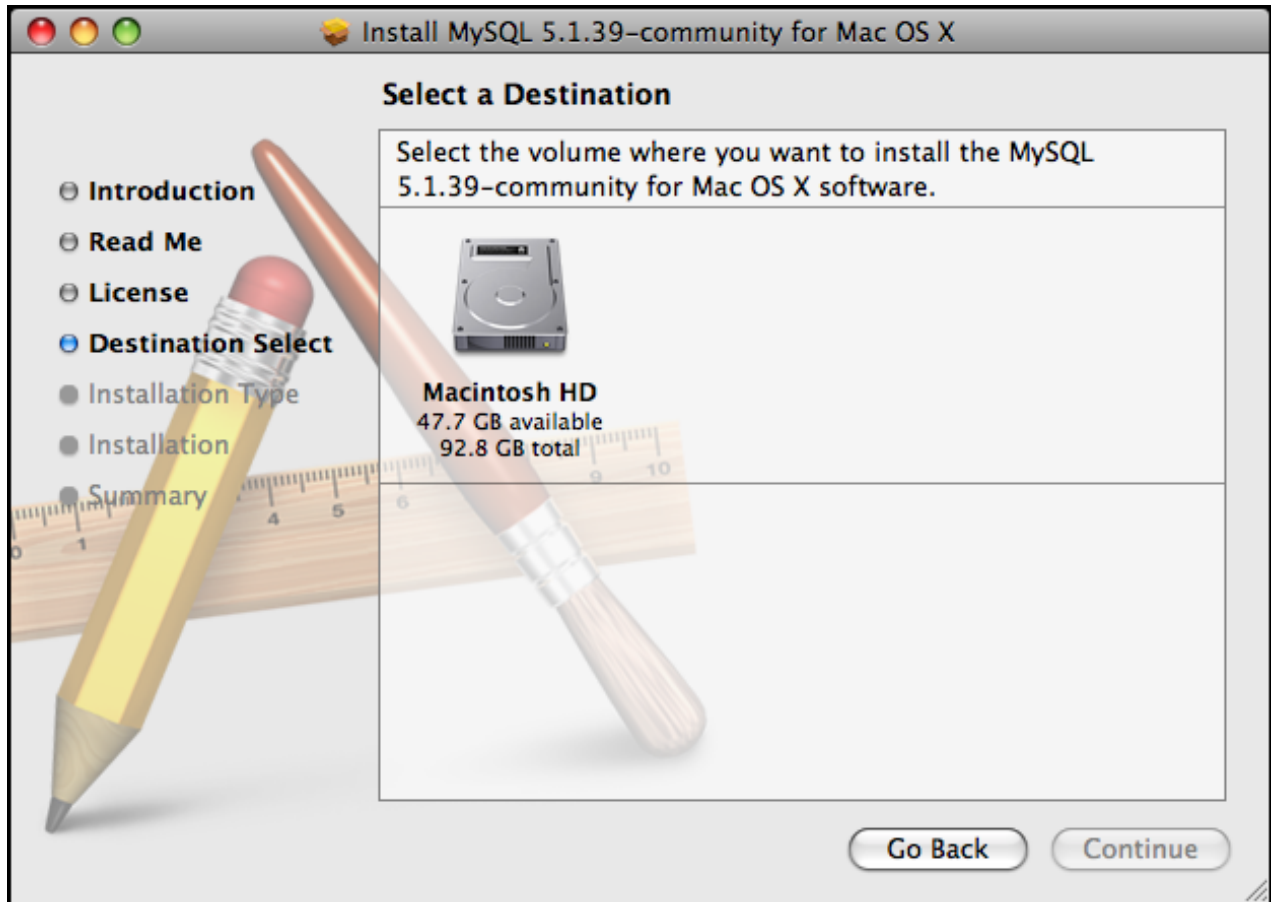

7. You will be asked to confirm the details of the installation, including the space required for the installation. To change the drive on which the startup item is installed, click either GO BACK or CHANGE INSTALL LOCATION.... To install the startup item, click INSTALL.
8. Once the installation has been completed successfully, you will be shown an **INSTALL SUCCEEDED** message.


For convenience, you may also want to install the startup item and preference pane. See [Chapter 2, Installing the MySQL Startup Item](#), and [Chapter 3, Installing and Using the MySQL Preference Pane](#).

Chapter 2. Installing the MySQL Startup Item

The MySQL Installation Package includes a startup item that can be used to automatically start and stop MySQL.


To install the MySQL Startup Item:

1. Download and open the MySQL package installer, which is provided on a disk image (.dmg) that includes the main MySQL installation package, the `MySQLStartupItem.pkg` installation package, and the `MySQL.prefPane`. Double-click the disk image to open it.
2. Double-click the `MySQLStartupItem.pkg` file to start the installation process.
3. You will be presented with the **INSTALL MySQL STARTUP ITEM** dialog.

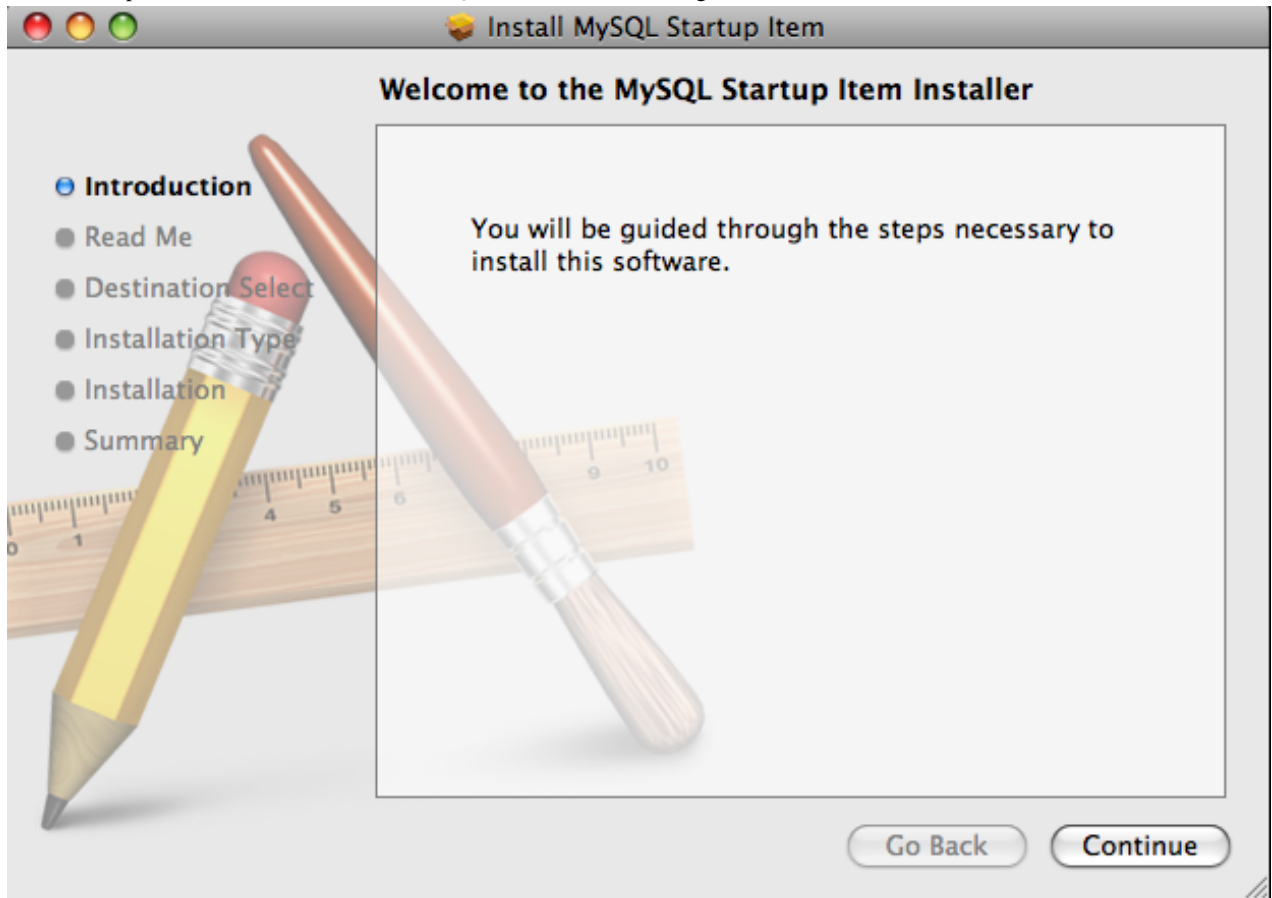


Click **CONTINUE** to continue the installation process.

4. A copy of the installation instructions and other important information relevant to this installation are displayed. Click **CONTINUE**.
5. Select the drive you want to use to install the MySQL Startup Item. The drive must have a valid, bootable, Mac OS X operating system installed. Click **CONTINUE**.

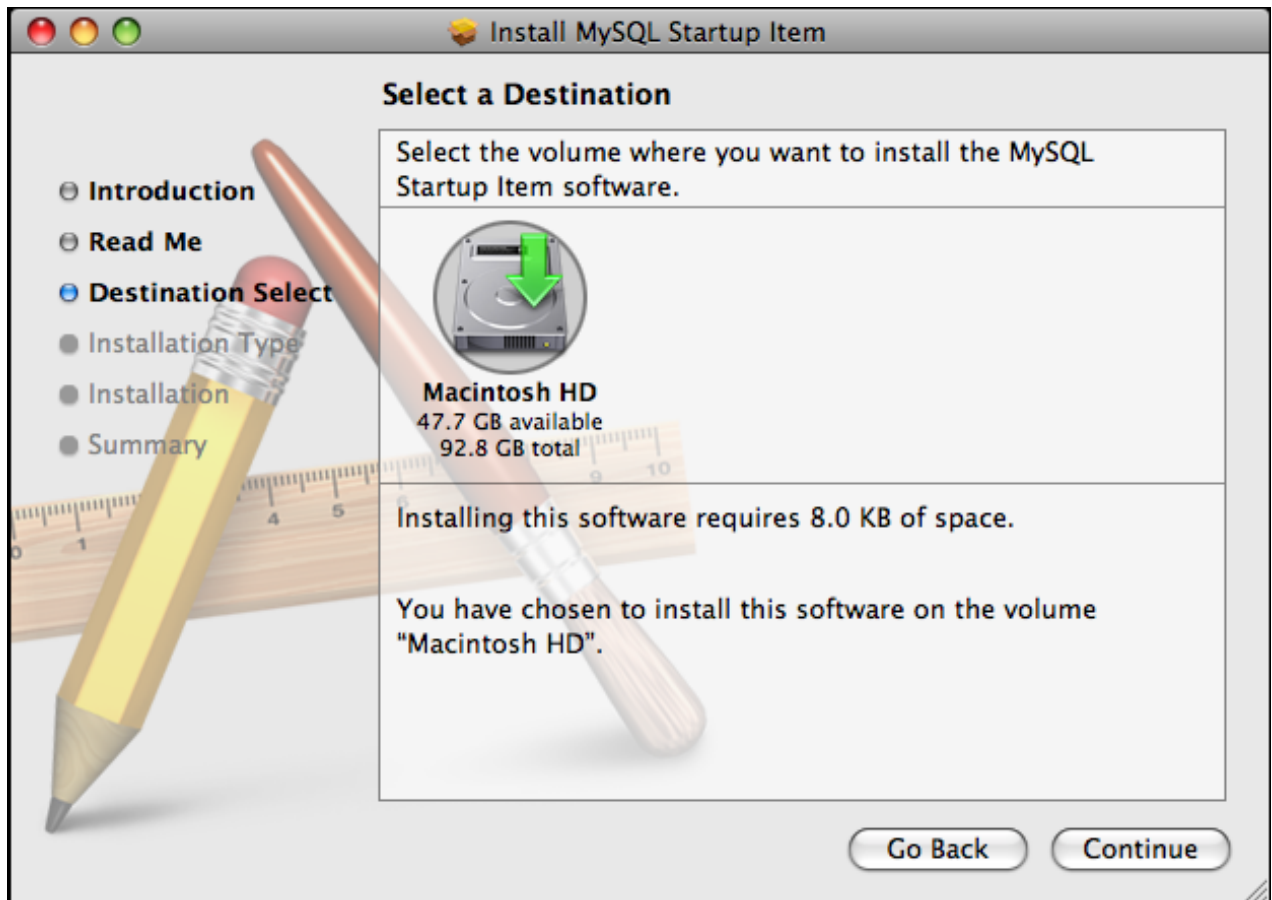

6. You will be asked to confirm the details of the installation. To change the drive on which the startup item is installed, click either GO BACK or CHANGE INSTALL LOCATION.... To install the startup item, click INSTALL.
7. Once the installation has been completed successfully, you will be shown an **INSTALL SUCCEEDED** message.

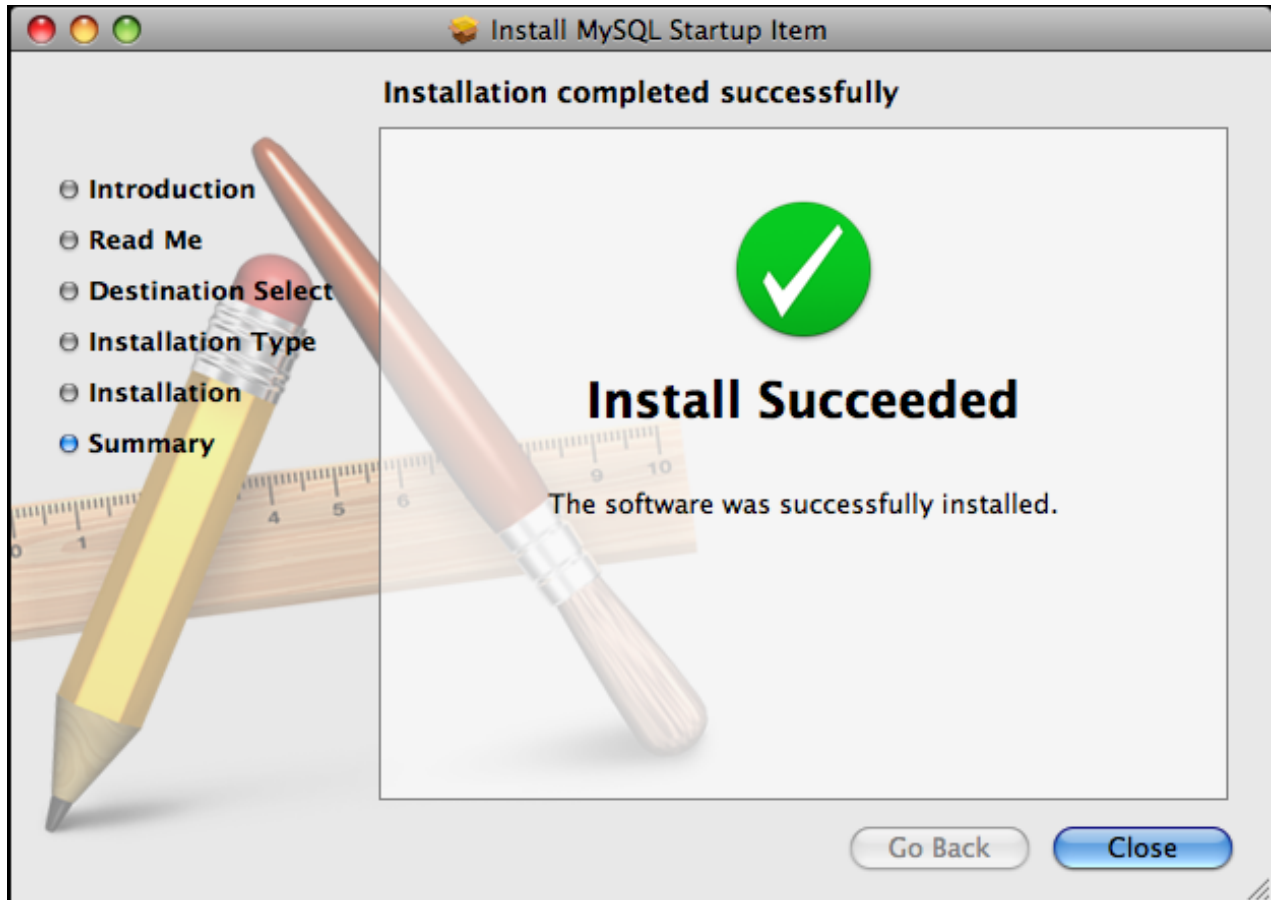

The Startup Item for MySQL is installed into `/Library/StartupItems/MySQLCOM`. The Startup Item installation adds a variable `MYSQLCOM=-YES-` to the system configuration file `/etc/hostconfig`. If you want to disable the automatic startup of MySQL, change this variable to `MYSQLCOM=-NO-`.

After the installation, you can start and stop MySQL by running the following commands in a terminal window. You must have administrator privileges to perform these tasks, and you may be prompted for your password.

If you have installed the Startup Item, use this command to start the server:

```
shell> sudo /Library/StartupItems/MySQLCOM/MySQLCOM start
```

If you have installed the Startup Item, use this command to stop the server:

```
shell> sudo /Library/StartupItems/MySQLCOM/MySQLCOM stop
```

Chapter 3. Installing and Using the MySQL Preference Pane

The MySQL Package installer disk image also includes a custom MySQL Preference Pane that enables you to start, stop, and control automated startup during boot of your MySQL installation.


To install the MySQL Preference Pane:

1. Download and open the MySQL package installer package, which is provided on a disk image (.dmg) that includes the main MySQL installation package, the `MySQLStartupItem.pkg` installation package, and the `MySQL.prefPane`. Double-click the disk image to open it.
2. Double-click the `MySQL.prefPane`. The MySQL System Preferences will open.
3. If this is the first time you have installed the preference pane, you will be asked to confirm installation and whether you want to install the preference pane for all users, or only the current user. To install the preference pane for all users you will need administrator privileges. If necessary, you will be prompted for the username and password for a user with administrator privileges.
4. If you already have the MySQL Preference Pane installed, you will be asked to confirm whether you want to overwrite the existing MySQL Preference Pane.

Note

The MySQL Preference Pane only starts and stops MySQL installation installed from the MySQL package installation that have been installed in the default location.

Once the MySQL Preference Pane has been installed, you can control your MySQL server instance using the preference pane. To use the preference pane, open the **SYSTEM PREFERENCES...** from the Apple menu. Select the MySQL preference pane by clicking the MySQL logo within the **OTHER** section of the preference panes list.

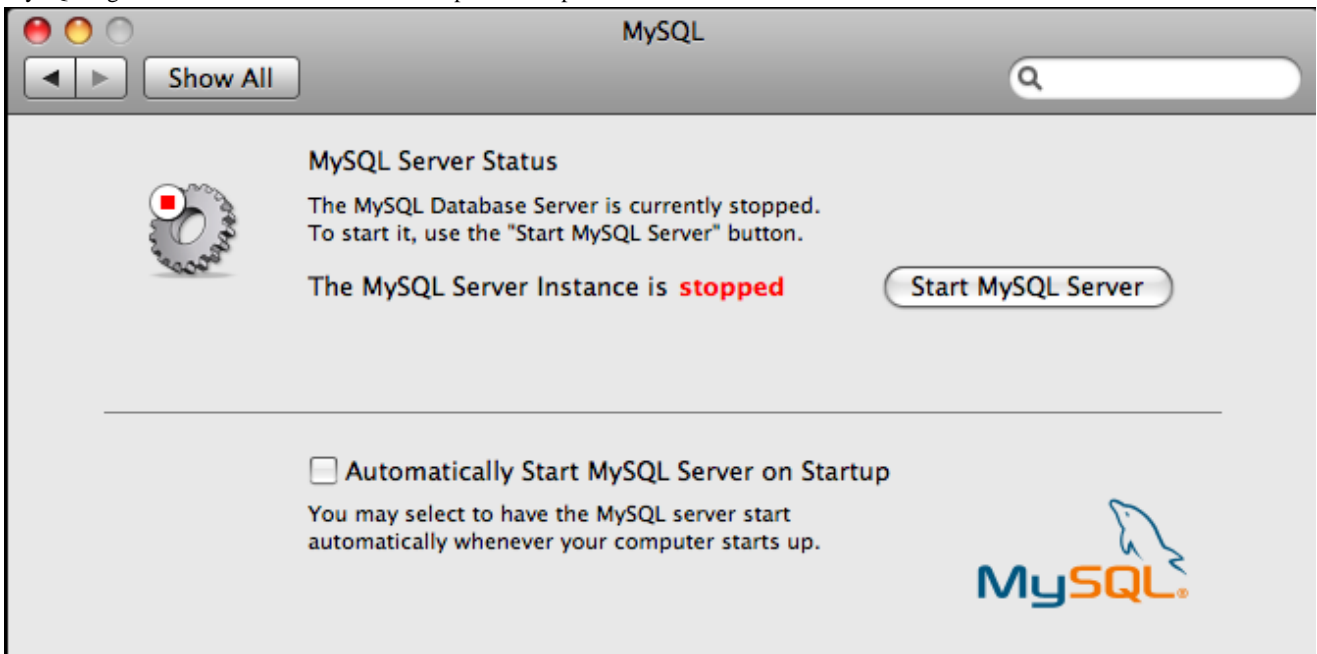

The MySQL Preference Pane shows the current status of the MySQL server, showing **STOPPED** (in red) if the server is not running and **RUNNING** (in green) if the server has already been started. The preference pane also shows the current setting for whether the MySQL server has been set to start automatically.

- **To start MySQL using the preference pane:**

Click **START MYSQL SERVER**. You may be prompted for the username and password of a user with administrator privileges to start

the MySQL server.

- **To stop MySQL using the preference pane:**

Click STOP MYSQL SERVER. You may be prompted for the username and password of a user with administrator privileges to stop the MySQL server.

- **To automatically start the MySQL server when the system boots:**

Check the checkbox next to AUTOMATICALLY START MYSQL SERVER ON STARTUP.

- **To disable automatic MySQL server startup when the system boots:**

Uncheck the checkbox next to AUTOMATICALLY START MYSQL SERVER ON STARTUP.

You can close the [System Preferences...](#) window once you have completed your settings.

Chapter 4. Using the Bundled MySQL on Mac OS X Server

If you are running Mac OS X Server, a version of MySQL should already be installed. The following table shows the versions of MySQL that ship with Mac OS X Server versions.

Table 4.1. MySQL Versions Preinstalled with Mac OS X Server

Mac OS X Server Version	MySQL Version
10.2-10.2.2	3.23.51
10.2.3-10.2.6	3.23.53
10.3	4.0.14
10.3.2	4.0.16
10.4.0	4.1.10a
10.5.0	5.0.45
10.6.0	5.0.82

The following table shows the installation layout of MySQL on Mac OS X Server.

Table 4.2. MySQL Directory Layout for Preinstalled MySQL installations on Mac OS X Server

Directory	Contents of Directory
<code>/usr/bin</code>	Client programs
<code>/var/mysql</code>	Log files, databases
<code>/usr/libexec</code>	The <code>mysqld</code> server
<code>/usr/share/man</code>	Unix manual pages
<code>/usr/share/mysql/mysql-test</code>	MySQL test suite
<code>/usr/share/mysql</code>	Miscellaneous support files, including error messages, character set files, sample configuration files, SQL for database installation
<code>/var/mysql/mysql.sock</code>	Location of the MySQL Unix socket

Additional Resources

- For more information on managing the bundled MySQL instance in Mac OS X Server 10.5, see [Mac OS X Server: Web Technologies Administration For Version 10.5 Leopard](#).
- For more information on managing the bundled MySQL instance in Mac OS X Server 10.6, see [Mac OS X Server: Web Technologies Administration Version 10.6 Snow Leopard](#).
- The MySQL server bundled with Mac OS X Server does not include the MySQL client libraries and header files required to access and use MySQL from a third-party driver, such as Perl DBI or PHP. For more information on obtaining and installing MySQL libraries, see [Mac OS X Server version 10.5: MySQL libraries available for download](#). Alternatively, you can ignore the bundled MySQL server and install MySQL from the package or tarball installation.

Chapter 5. General Notes on Installing MySQL on Mac OS X

You should keep the following issues and notes in mind:

- The default location for the MySQL Unix socket is different on Mac OS X and Mac OS X Server depending on the installation type you chose. The following table shows the default locations by installation type.

Table 5.1. MySQL Unix Socket Locations on Mac OS X by Installation Type

Installation Type	Socket Location
Package Installer from MySQL	<code>/tmp/mysql.sock</code>
Tarball from MySQL	<code>/tmp/mysql.sock</code>
MySQL Bundled with Mac OS X Server	<code>/var/mysql/mysql.sock</code>

To prevent issues, you should either change the configuration of the socket used within your application (for example, changing `php.ini`), or you should configure the socket location using a MySQL configuration file and the `socket` option. For more information, see [Server Command Options](#).

- You may need (or want) to create a specific `mysql` user to own the MySQL directory and data. On Mac OS X 10.4 and lower you can do this by using the [Netinfo Manager](#) application, located within the [Utilities](#) folder within the [Applications](#) folder. On Mac OS X 10.5 and later you can do this through the [Directory Utility](#). From Mac OS X 10.5 and later (including Mac OS X Server 10.5) the `mysql` should already exist. For use in single user mode, an entry for `_mysql` (note the underscore prefix) should already exist within the system `/etc/passwd` file.
- Due to a bug in the Mac OS X package installer, you may see this error message in the destination disk selection dialog:

```
You cannot install this software on this disk. (null)
```

If this error occurs, click the [Go Back](#) button once to return to the previous screen. Then click [Continue](#) to advance to the destination disk selection again, and you should be able to choose the destination disk correctly. We have reported this bug to Apple and it is investigating this problem.

- Because the MySQL package installer installs the MySQL contents into a version and platform specific directory, you can use this to upgrade and migrate your database between versions. You will need to either copy the `data` directory from the old version to the new version, or alternatively specify an alternative `datadir` value to set location of the data directory.
- You might want to add aliases to your shell's resource file to make it easier to access commonly used programs such as `mysql` and `mysqladmin` from the command line. The syntax for `bash` is:

```
alias mysql=/usr/local/mysql/bin/mysql
alias mysqladmin=/usr/local/mysql/bin/mysqladmin
```

For `tcsh`, use:

```
alias mysql /usr/local/mysql/bin/mysql
alias mysqladmin /usr/local/mysql/bin/mysqladmin
```

Even better, add `/usr/local/mysql/bin` to your `PATH` environment variable. You can do this by modifying the appropriate startup file for your shell. For more information, see [Invoking MySQL Programs](#).

- After you have copied over the MySQL database files from the previous installation and have successfully started the new server, you should consider removing the old installation files to save disk space. Additionally, you should also remove older versions of the Package Receipt directories located in `/Library/Receipts/mysql-VERSION.pkg`.